




应用霍尔效应开环原理的电流传感器，能在电隔离条件下测量直流、交流、脉冲以及各种不规则波形的电流。
Open loop current sensor based on the principle of Hall-effect. It can be used for measuring AC,DC,pulsed and mixed current.

电参数/Electrical characteristics

	型号 Type	FS2000HB	FS3000HB	FS5000HB	FS8000HB	FS10000HB	
I_{PN}	原边额定输入电流 Primary nominal input current	2000	3000	5000	8000	10000	A
I_P	原边电流测量范围 Measuring range of primary current	0~±4000	0~±5000	0~±7500	0~±10000	0~±12000	A
V_{OUT}	副边额定输出电压 Nominal output voltage	4±1%					V
V_C	电源电压 Supply voltage	±12~±15 (±5%)					V
I_C	电流消耗 Current consumption	$V_C=±15V$	<25				mA
V_d	绝缘电压 Insulation voltage	在原边与副边电路之间2.5KV 有效值/50Hz/1 分钟					
ϵ_L	线性度 Linearity	<1					%FS
V_0	零点失调电压 Offset voltage	$T_A=25\text{ C}$	<±25				mV
V_{OM}	磁失调电压 Residual voltage	$I_{PN} \rightarrow 0$	<±30				mV
V_{OT}	失调电压温漂 Thermal drift of V_0	$I_{PN}=0\ T_A=-25 \sim +85\text{ °C}$	<±1				mV/ C
T_r	响应时间 Response time	<7					μs
f	频带宽度(-3dB) Frequency bandwidth(-3dB)	DC ~ 3					kHz
T_A	工作环境温度 Ambient operating temperature	-25 ~ +85					C
T_S	贮存环境温度 Ambient storage temperature	-40 ~ +100					C
R_L	负载电阻 Load resistance	≥10K					Ω
	标准 Standard	GI/FS-0105					

外形尺寸 (mm) /Dimensions of drawing (mm)

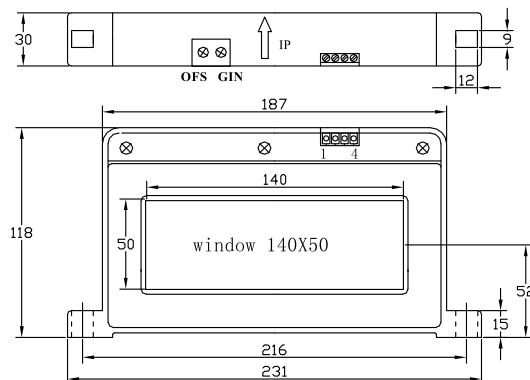

引脚输出: 1,+15V 2,-15V 3,Vout 4,0V(电源地) OFS,零点调节GIN,幅度调节
Elucidation: 1:+15V 2:-15V 3: VOUT 4:0V(GND) OFS:Zero adjustment GIN:Gain adjustment (Red:+15V Blue:-15V Yellow:VOUT Black:0V)

使用说明/Remarks

- 错误的接线可能导致传感器损坏。传感器通电后，当被测电流从传感器箭头方向穿过，即可在输出端测得同相电压值。
 - 传感器的输出幅度可根据用户需求进行适当的调节。
 - 可按用户需求定制不同额定输入电流和输出电压的传感器。
- Incorrect connection may lead to the damage of the sensor.
·VOUT is positive when the IP flows in the direction of the arrow.